

PNEUMATIC GREASE PUMP SETS FOR DRUMS 18-30 KG



GREASE DISTRIBUTION

Art. 013-1106-000

Wheeled grease set suitable for drums 18–30 kg

Composed by:

- Art.010-1005-000 Grease pump ratio=60:1
- Art.030-1392-000 2- wheels trolley
- Art.014-1051-030 Lid Ø 320 mm
- Art.014-1062-030 Follower plate Ø 310 mm
- Art.907-0102-030 R2 1/4" hose – 3.0 m length
- Art.014-1081-000 Grease gun with swivel joint


Art. 013-1105-000

Wheeled grease set suitable for drums 18–30 kg

Composed like Art.013.1106.000 but without:

- Art.014-1062-030 Follower plate Ø 310 mm

							Ø 260 - 320 mm
013-1106-000	15,740	0,056	1				
013-1105-000	14,310	0,056	1				



013-1106-000

Art. 013-1113-000

Wheeled grease set suitable for drums 18–30 kg

Composed by:

- Art.010-1005-000 Grease pump ratio=60:1
- Art.030-1392-000 2- wheels trolley
- Art.014-1052-030 Lid Ø 350 mm
- Art.014-1063-030 Follower plate Ø 340 mm
- Art.907-0102-030 R2 1/4" hose – 3.0 m length
- Art.014-1081-000 Grease gun with swivel joint


Art. 013-1112-000

Wheeled grease set suitable for drums 18–30 Kg

Composed like Art.013-1113-000 but without:

- Art.014-1063-030 Follower plate Ø 340 mm

							Ø 300 - 350 mm
013-1113-000	16,590	0,056	1				
013-1112-000	14,630	0,056	1				



013-1113-000

Art. 013-1108-000

Wheeled grease set suitable for drums 18–30 Kg

Composed by:

- Art.010-1005-000 Grease pump ratio=60:1
- Art.030-1393-000 2 pneumatic wheels trolley
- Art.014-1051-030 Lid Ø 320 mm
- Art.014-1062-030 Follower plate Ø 310 mm
- Art.907-0102-030 R2 1/4" hose – 3.0 m length
- Art.014-1081-000 Grease gun with swivel joint


Art. 013-1107-000

Wheeled grease set suitable for drums 18–30 Kg

Composed like Art.013-1108-000 but without:

- Art.014-1062-030 Follower plate Ø 310 mm

							Ø 260 - 320 mm
013-1108-000	18,000	0,056	1				
013-1107-000	16,670	0,056	1				



013-1108-000



AIR-OPERATED GREASE PUMPS Mod. 660

COMPRESSION RATIO = 60:1

DELIVERY = 1600 g/min



Art. 010-1000-000

Air-operated grease pump ratio=60:1 Mod. 660

For standard drums 12-16 kg

(shank length 410 mm)

Polyurethane seals

Art. 010-1005-000

Air-operated grease pump ratio=60:1 Mod. 660

For standard drums 18-30 kg

(shank length 480 mm)

Polyurethane seals

Art. 010-1010-000

Air-operated grease pump ratio=60:1 Mod. 660

For standard drums 50-60 kg

(shank length 750 mm)

Polyurethane seals

Art. 010-1015-000

Air-operated grease pump ratio=60:1 Mod. 660



For standard barrels 180-220 kg

(shank length 950 mm)

Polyurethane seals



Art. No.	Weight (kg)	Shank Length (mm)	Drum Capacity (kg)
010-1000-000	4,980	410	12-16
010-1005-000	5,240	480	18-30
010-1010-000	6,300	750	50-60
010-1015-000	7,100	950	180-220

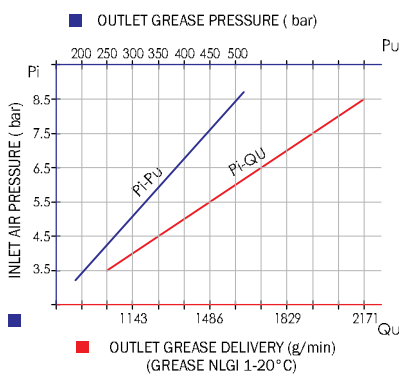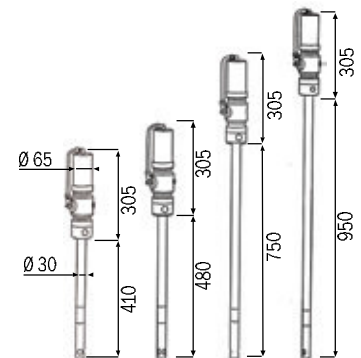

Technical data		010-1000-000	010-1005-000	010-1010-000	010-1015-000
Compression ratio		60:1	60:1	60:1	60:1
Max pressure feeding	bar	8	8	8	8
Air consumption medium	l/min	130	130	130	130
Air inlet connection	BSP	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Grease outlet connection	BSP	M 1/4" G	M 1/4" G	M 1/4" G	M 1/4" G
Grease delivery capacity 6 bar g/min		1600	1600	1600	1600
Noise	dB	76	76	76	76
Shank diameter	mm	30	30	30	30
Shank length	mm	410	480	750	950
For drums with capacity of	kg	12-16	18-30	50-60	180-220

Those are suitable for the supply at high pressure of all kinds of grease at short and long distance.

The operating pressure of the grease pumps hereby may vary between a minimum of 2.5 bar and a maximum of 8 bar. In order to optimize the efficiency and the life of our air operated pumps, we recommend to use filtered and lubricated air.